



DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

UNDERCOUNTER KROMO DISHWASHER - AQUA

Item: 49125 | Model: CD-IT-50-1-AQUA

SIMPLICITY AND COMPLETENESS

Ideal for bars, pubs, restaurants and hotels, this beautifully designed undercounter dishwasher machine feature a wide loading capacity granting the highest performance.

FEATURES

- Double skin door
- 1 wash cycle
- Overflow and drain pipes integrated system, for a triple protection of the wash pump
- Anti-drop roof panel
- Door security microswitch
- Split wash and rinse arms
- Built-in rinse-aid dispenser
- Fully automatic process
- Standard drain pump

OPTIONS

- Cold rinse
- Detergent dispenser
- S/S surface filters



WARRANTY

PARTS AND LABOR



Must be installed by a certified electrician.




Authorized Dealer

DISHWASHER

UNDERCOUNTER DISHWASHER



TECHNICAL DRAWING

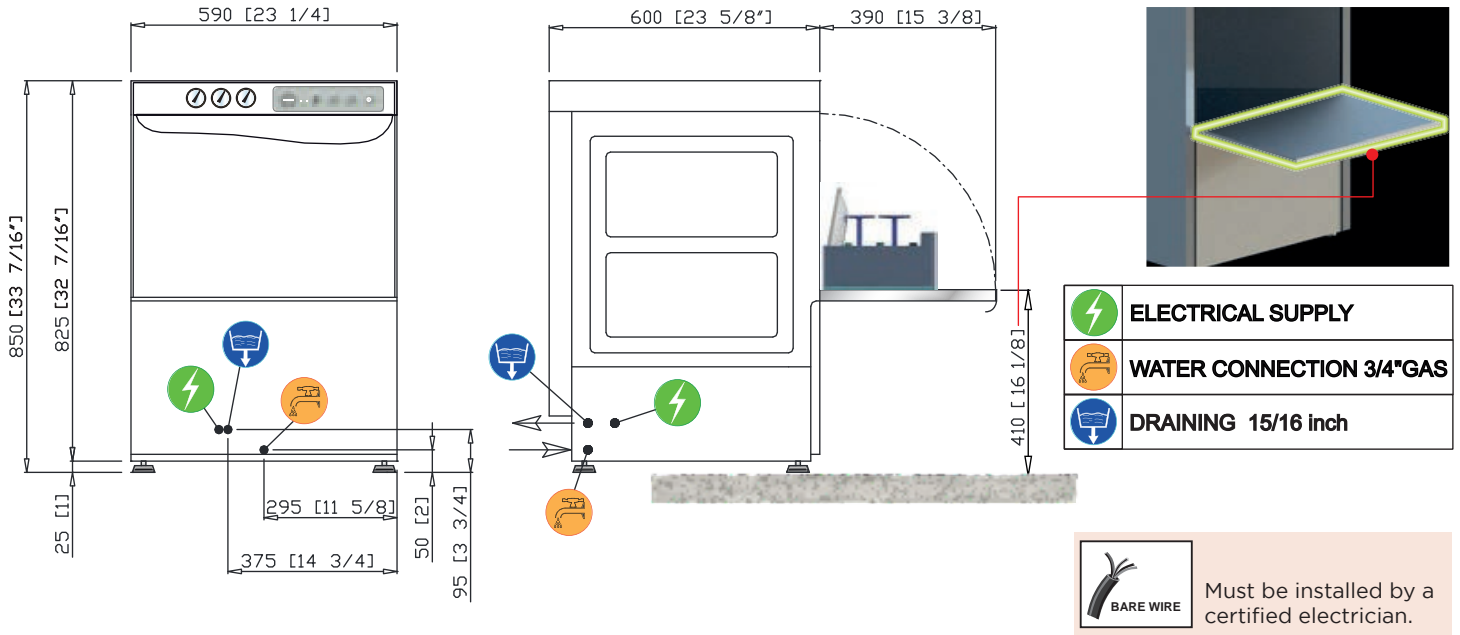

TECHNICAL SPECIFICATIONS

ITEM	49125	DIMENSIONS (WDH)	23 1/4" x 23 5/8" x 33 7/16"
MODEL	CD-IT-50-1-AQUA	WEIGHT	130 lbs
CROCKERY DIMENSIONS	PLATES: 13 5/8" dia DISHES MAX HEIGHT: 12 5/8"	WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	0.74 gal
RACK DIMENSIONS	20" x 20"	BOOSTER CAPACITY	1.51 gal
RACK EQUIPMENT	(1) PLASTIC PLATES BASKET (1) LARGE MESH GLASS BASKET (1) CUTLERY BASKET	BOOSTER HEATING ELEMENT	6.53 kW
ELECTRICAL	220-240V / 60Hz / 1Ph	RINSING TEMPERATURE (SET)	185°F
POWER REQUIRED	7.09 kW	TANK CAPACITY	7.66 gal
WATER HARDNESS	2-8 °F	TANK HEATING ELEMENT	2.94 kW
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI	TANK TEMPERATURE (SET)	160°F
WASHING CYCLES (sec)	1 (120) 2 (180)	PUMP POWER	0.56 kW (89,8 gal/min***)
WATER SUPPLY 131 °F RACKS/H (*) (°)	30 20	DRAIN PUMP	43W hMAX 31 1/2" (10.78 gal/min***)
WATER SUPPLY 50 °F RACKS/H (*) (°)	21 20	NOISE	63 dB(A)

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

OMCAN INC.

Telephone: 1-800-465-0234
 Fax: (905) 607-0234
 Email: sales@omcan.com
 Website: www.omcan.com



Follow us to keep up to date with the latest news and offers

